


“Switchit” LED T8 lamp

SPECIFICATION FEATURES & BENEFITS

- High output LED T8 lamp
- Installs in seconds.
- Customize light levels for low or high situations.
- Compatible with a majority of emergency programmed start fixtures 120/277v.
- Extends existing ballast life up to 10x rated life.
- No rewiring or new ballasts needed
- 5 year warranty
- LUMENS: HI= 4000 / LO=3000 TWO LAMPS
- LUMENS: HI= 2200 / LO=1600 ONE LAMP
- HI wattage setting: 20w per bulb
- LO wattage setting: 14w per bulb
- 110 - LPW
- CCT: 5000

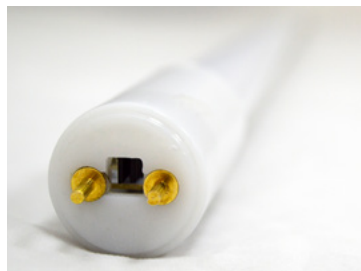

Example Model Number: **GTL-T8-AA-BB-CC-D**

GTL = Family Series

T8 = T8 Style Tube

AA = LED TUBE LENGTH INCHES (48")

BB = Output power options per bulb (nominal wattage); HI = 20W; LO = 14W

CC = CCT; **GR** = 5000K; **BR** = 5000K[80CRI]; **BL** = 4000K

D = Lens options; **C** = Clear lens; **F** = Frosted

Model Number:

GTL-T8-48-LO-GR-C



Fully Compliant with ARRA Buy American Requirements. Made in the USA.