

GTL-AR-TITAN HM 2X112

[600W LED High Mast Luminaire]



Description and Application:

Perfect for 80-ft and 120-ft high-mast applications on Roadways, Airports, Rail Yards and Container Terminals, comparable to legacy 1000W -2000W HID technology.

Specification Features:

- High Power LED Modules max, 600W
- Max Lumen Output = 50,000
- Kelvin = 5000k
- Titan LED Module specifications available on website

Driver:

120-277VAC driver input.

Additional Information:

Operating Temperature Range:
up to +55°C Nominal

Photometrics:
.ies files available

Optics offered for different distributions.
(Dist. = 120° w/o secondary optics)

Surge Protector:
- Required for ALL 347V-480V applications in order to qualify for Warranty
- Recommended for all outdoor applications


L70 > 60,000Hrs.

Life Sync adjusts module to operate at max performance in any given environment

Warranty: Driver = 5 years
Solstice Light Engine = 10 years
Fixture = 10 years

Ordering Code Example:

GTL-AR-TITAN-HM - 2x112 - HO - SV - GR - NL

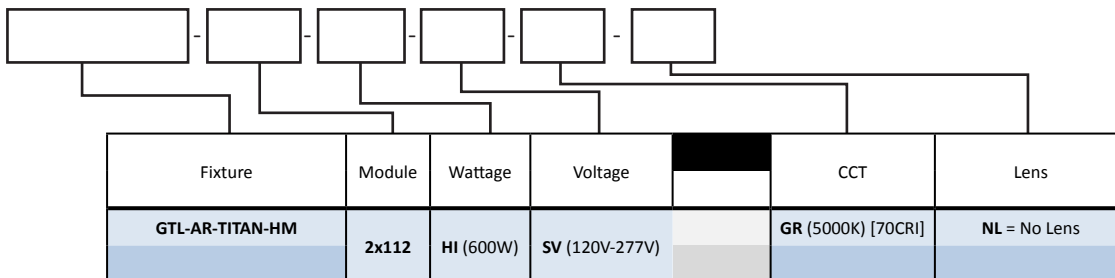

Fully Compliant with ARRA Buy American Requirements. Made in the USA.