

## GTL-PT-88266

[30W-135W LED Finial Post Top Fixture]

### Description:

Acorn Post Top Fixture with Threaded Rod and Finial Mount

### Fixture Features:

- Accommodates 3" poles.
- Integrated UL listed Driver.
- Finial Mount Bracket
- Precision LED setup available for maximum photometric efficiency and optimum light distribution.
- Replaces 100W – 250W lamps, using up to 70% less energy!
- Specifications subject to change without notice.

### Retro Features:

- Power - 60W-135W
- Power Supply - Quick Connect
- 120-277VAC or 347-480VAC input voltage
- Active Cooling
- Magnetic levitating fan, zero friction.

### Additional Information:

Operating Temperature Range:  
-40°C to 55°C Nominal

Photometrics:  
.ies files available



Optics offered for different distributions.  
(Dist. = 120° w/o secondary optics)

Surge Protector:  
- Required for ALL 347V-480V applications in order to qualify for Warranty  
- Recommended for all outdoor applications

L70 > 150,000Hrs.

Warranty: Driver = 5 years  
Solstice Light Engine = 10 years  
Fixture = 10 years

Life Sync adjusts module to operate at max performance in any given environment

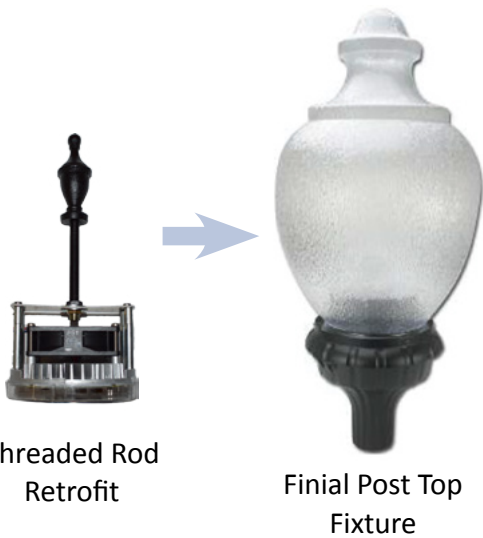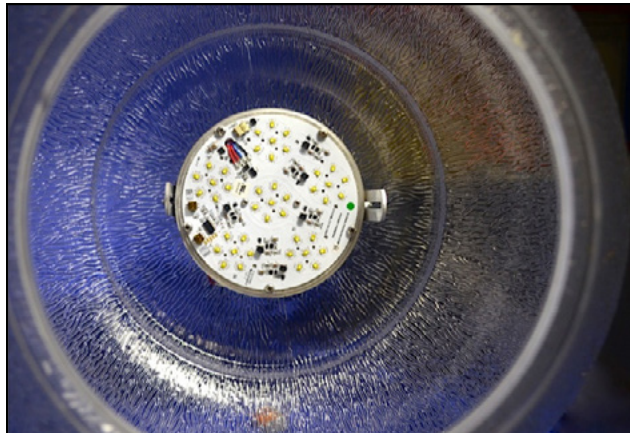

Specular reflector cone at bottom to disperse light 360°

### Fixture Housing Accessories

Catalog #	Description
<b>Finial</b>	Decorative mounting option
<b>IP67</b>	IP67 Rated LED Engine
<b>GT-LSP-120</b>	Surge Protector. 120 V 10 kA Parallel. 20kA maximum discharge current.
<b>GT-LSP-240</b>	Surge Protector. 240 V 10 kA Parallel. 20kA maximum discharge current.
<b>GT-LSP-277</b>	Surge Protector. 277 V 10 kA Parallel. 20kA maximum discharge current.
<b>GT-LSP-347</b>	Surge Protector. 347 V 10 kA Parallel. 20kA maximum discharge current.
<b>GT-LSP-480</b>	Surge Protector. 480 V 10 kA Parallel. 20kA maximum discharge current.

### LED Module Compatibility

Product	Output Setting	LED Chip Drive Current [mA]	Rated Lumens [Lm]	Rated Watts [W]
GTSOL5498 x 1	HO	900	13164	135
GTSOL5498 x 1	HI	700	9447	95
GTSOL5498 x 1	MH	525	8999	85
GTSOL5498 x 1	ML	350	7814	75
GTSOLM21 x 1	HI	700	5910	60
GTSOLM21 x 1	MH	600	4594	50
GTSOLM21 x 1	ML	500	3742	40
GTSOLM21 x 1	LO	400	2679	30



Fully Compliant with ARRA Buy American Requirements. Made in the USA.

\*Shipping will not be covered on the 88266 fixture by GTL on any orders placed\*




# Pricing Information

## GTL-PT-88266

[30W-135W LED Finial Post Top Fixture]

SR16-6R1

### Details

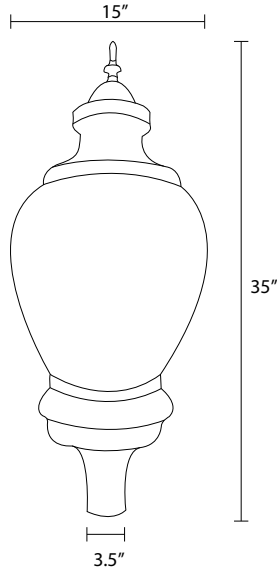

### Features



- Life Sync
- Module Temp Protection
- Lumen Depreciation Maintenance
- Wattage Selections (on board)
- On Board Programming
  - 5-6-1 Energy Saving Program
  - 0-10V Dimming
- Lumiled Luxeon LED chips
- Active Thermal Management
- Optical Distribution Options
- -40°C to 55°C Nominal Operating Temperature
- 10 Year Warranty

Ordering Code Example:

GTL-PT-88266 - 5498 - HI - SV - GR - NL / GT-FINIAL - GT-LSP-120

Fixture	Module	Wattage	Voltage		CCT	Lens	Accs	
GTL-PT-88266	5498	HO (135W)	SV (120V-277V)		GR (5000K) [70CRI]	NL = No Lens	GT-FINIAL	
			HV (347V-480V)		BR (5000K) [80CRI]	10D = 10D Lens	IP67 = M21*	
	5498	HI (95W)	SV (120V-277V)		YW (4100K) [70CRI]	25D = 25D Lens	IP67 = 5498*	
			HV (347V-480V)		BL (4000K) [80CRI]	50D = 50D Lens	GT-LSP-120	
	5498	MH (85W)	SV (120V-277V)		RD (3500K) [80CRI]	75D = 75D Lens	GT-LSP-240	
			HV (347V-480V)		PR (3000K) [95CRI]	360D = 360D Lens	GT-LSP-277	
	5498	ML (75W)	SV (120V-277V)		OR (2700K) [80CRI]	360s = 360 Square Lens	GT-LSP-347	
			HV (347V-480V)		GRO (Grow)†	T2 = Type II Lens	GT-LSP-480	
	M21	HI (60W)	SV (120V-277V)		AMB (Amber)†	T3 = Type III Lens		
			HV (347V-480V)		AQU (Aquarium)†			
	M21	MH (50W)	SV (120V-277V)		RYB (Royal Blue)†			
			HV (347V-480V)					
	M21	ML (40W)	SV (120V-277V)					
			HV (347V-480V)					
	M21	LO (30W)	SV (120V-277V)					
			HV (347V-480V)					

\* IP67 upgrade for module + fan (only NL, 10D, 25D, 50D & 75D)

† Upcharges not included in MSRP Price

Please see previous page for accessory information

Please note, prices may change with quantity

**Fully Compliant with ARRA Buy American Requirements. Made in the USA.**