

# GTL-HB-HB11AR22

[75W-360W LED Aluminum High Bay Fixture 22"]



### LED Module Compatibility

Product	Output Setting	LED Chip Drive Current [mA]	Rated Lumens [Lm]	Rated Watts [W]
GTSOL112 x 1	HO	2983	33260	360
GTSOL112 x 1	HI	2321	28610	300
GTSOL112 x 1	MH	2120	24290	260
GTSOL112 x 1	ML	1670	19570	200
GTSOL5498 x 4	HO	900	52656	540
GTSOL5498 x 4	HI	700	37788	380
GTSOL5498 x 4	ML	350	31256	300
GTSOL5498 x 4	ML	350	31256	300
GTSOL5498 x 3	HO	900	39492	405
GTSOL5498 x 3	HI	700	28341	285
GTSOL5498 x 3	MH	525	26997	255
GTSOL5498 x 3	ML	350	23442	225
GTSOL5498 x 2	HO	900	26328	270
GTSOL5498 x 2	HI	700	18894	190
GTSOL5498 x 2	MH	525	17998	170
GTSOL5498 x 2	ML	350	15628	150
GTSOL5498 x 1	HO	900	13164	135
GTSOL5498 x 1	HI	700	9447	95
GTSOL5498 x 1	MH	525	8999	85
GTSOL5498 x 1	ML	350	7814	75
GTSOLM21 x 1	HI	700	5910	60
GTSOLM21 x 1	MH	600	4594	50
GTSOLM21 x 1	ML	500	3742	40
GTSOLM21 x 1	LO	400	2679	30

### Description and Application:

High Bay – Aluminum housing.  
Includes driver housing and hook.  
Additional options for wattages include up to 540W.  
(ask about additional wattage/pricing options)

### Specification Features:

- Precision LED setup available for maximum photometric efficiency and optimum light distribution.
- LED wattages from 80 - 540 Watts.
- Replaces up to 1000 Watt HID bulbs, using 80% less energy!
- Specifications subject to change without notice.

### Input Voltage:

120-277VAC driver input.  
Also available in 347-480 VAC driver input.

### Additional Information:

Operating Temperature Range:  
-40°C to 55°C Nominal

Photometrics:  
.ies files available

Optics offered for different distributions.  
(Dist. = 120° w/o secondary optics)

Surge Protector:  
- Required for ALL 347V-480V applications in order to qualify for Warranty  
- Recommended for all outdoor applications

L70 > 150,000Hrs.

Life Sync adjusts module to operate at max performance in any given environment

Warranty: Driver = 5 years  
Solstice Light Engine = 10 years  
Fixture = 10 years

### Accessories

Catalog #	Description
HBGL22	22" Flat Glass
HBCB22	22" Clampband
HBAR22WG	Wire Guard for 22" Reflectors
CPMH1	Malleable Hook with 3/4" NPS threads
CPCS1633	Cord Set, Blunt Cut, 3', 16/3 600V STW Cord
CPCS1633P110	Cord Set, 3-Prong Polarized, 3' Cord
CPCS1633P120	Cord Set 120v Twist-Lock L5-15P Plug, 3' Cord
CPCS1633P240	Cord Set 240v Twist-Lock L6-15P Plug, 3' Cord
CPCS1633P277	Cord Set 277v Twist-Lock L7-15P Plug, 3' Cord
IP67	IP67 Rated LED Engine
GT-LSP-120	Surge Protector. 120 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-240	Surge Protector. 240 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-277	Surge Protector. 277 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-347	Surge Protector. 347 V 10 kA Parallel. 20kA maximum discharge current.
GT-LSP-480	Surge Protector. 480 V 10 kA Parallel. 20kA maximum discharge current.



Fully Compliant with ARRA Buy American Requirements. Made in the USA.




# Pricing Information

## GTL-HB-HB11AR22

[75W-360W LED Aluminum High Bay Fixture 22"]

SR16-6R1

### Details

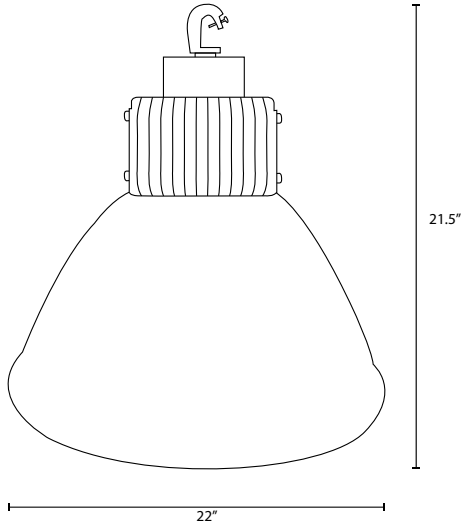

### Features



- Life Sync
- Module Temp Protection
- Lumen Depreciation Maintenance
- Wattage Selections (on board)
- On Board Programming
  - 5-6-1 Energy Saving Program
  - 0-10V Dimming
- Lumiled Luxeon LED chips
- Active Thermal Management
- Optical Distribution Options
- -40°C to 55°C Nominal Operating Temperature
- 10 Year Warranty

Ordering Code Example:

GTL-HB-HB11AR22 - 112 - HO - SV - BL - 360s / GT-LSP-120

Fixture	Module	Wattage	Voltage		CCT	Lens	Accs	
GTL-HB-HB11AR22	112**	HO (360W)	SV (120V-277V)		GR (5000K) [70CRI]	NL = No Lens	HBGL22	
			HV (347V-480V)		BR (5000K) [80CRI]	10D = 10D Lens	HBCB22	
	112**	HI (300W)	SV (120V-277V)		YW (4100K) [70CRI]	25D = 25D Lens	HBAR22WG	
			HV (347V-480V)		BL (4000K) [80CRI]	50D = 50D Lens	CPMH1	
	112**	MH (260W)	SV (120V-277V)		RD (3500K) [80CRI]	75D = 75D Lens	CPCS1633	
			HV (347V-480V)		PR (3000K) [95CRI]	360D = 360D Lens	CPCS1633P110	
	112**	ML (200W)	SV (120V-277V)		OR (2700K) [80CRI]	360s = 360 Square Lens	CPCS1633P120	
			HV (347V-480V)		GRO (Grow)†	T2 = Type II Lens	CPCS1633P240	
	5498	HO (135W)	SV (120V-277V)		AMB (Amber)†	T3 = Type III Lens	CPCS1633P277	
			HV (347V-480V)		AQU (Aquarium)†		IP67 = 5498*	
	5498	HI (95W)	SV (120V-277V)		RYB (Royal Blue)†		IP67 = 112*	
			HV (347V-480V)				GT-LSP-120	
	5498	MH (85W)	SV (120V-277V)				GT-LSP-240	
			HV (347V-480V)				GT-LSP-277	
	5498	ML (75W)	SV (120V-277V)				GT-LSP-347	
			HV (347V-480V)				GT-LSP-480	

\* IP67 upgrade for module + fan (only NL, 10D, 25D, 50D & 75D)

\*\* 112 Module only offered in BR, BL & OR CCT's

† Upcharges not included in MSRP Price

Please see previous page for accessory information

Please note, prices may change with quantity

**Fully Compliant with ARRA Buy American Requirements. Made in the USA.**