

### GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

### CASE STYLE R: METAL



### ELECTRICAL SPECIFICATIONS

Watts	Output Voltage	Max Output Current	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
60W	12 VDC	5.00A	120 - 277 VAC	71W	0.65/0.29A	>0.90	85%	LV60-12N-UNV-R <sup>S</sup>
	24 VDC	2.50A	120 - 277 VAC	70W	0.65/0.29A	>0.90	86%	LV60-24N-UNV-R <sup>S</sup>

### PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Withstanding voltage: I/P - O/P 2kVAC
- Operating temperature range: -40°C to 90°C (measured at Tcase)
- MTBF: 299,000 hours @ 40°C ambient (~70°C case temp)

### APPROVALS

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits
- IP67
- <sup>S</sup>UL879 SAM approved



### WARRANTY

- 5 Year limited warranty

### RELATED PRODUCT

- Case Style F: 5.0" x 3.0" x 1.4"
- Case Style K: 9.6" x 1.9" x 1.5"
- Case Style I: 9.5" x 1.7" x 1.2"


### MECHANICAL SPECIFICATIONS: CASE STYLE R

#### WIRING INFORMATION

Input: 12", Type SJTW Cable, Black (L), White (N), Ground (G) #18AWG  
 Output: 12", Type SJTW Cable, Red (+), Blue (-) #18AWG

#### PACKAGING INFORMATION

Weight: 25.5oz  
 Quantity: 40pc/carton

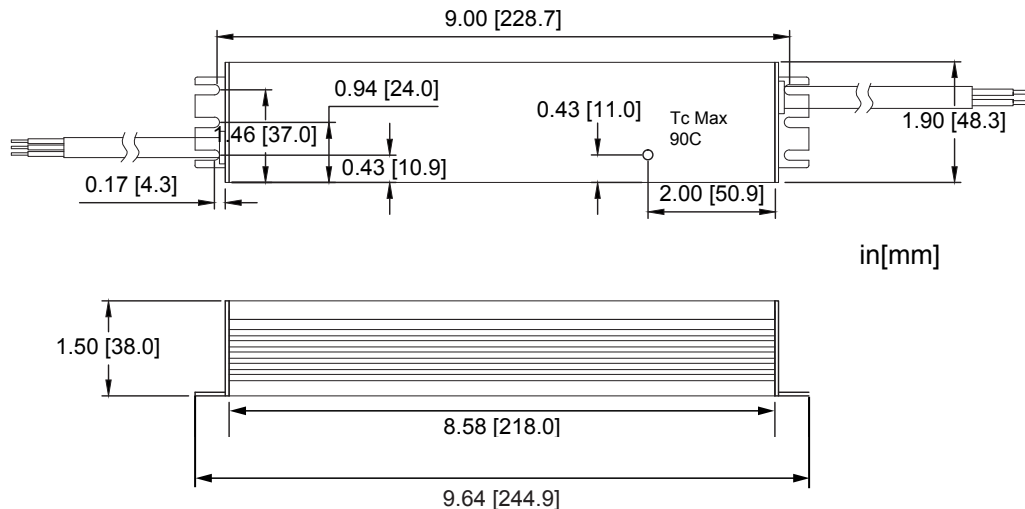



### GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

### CASE STYLE R: METAL



### PERFORMANCE CURVES

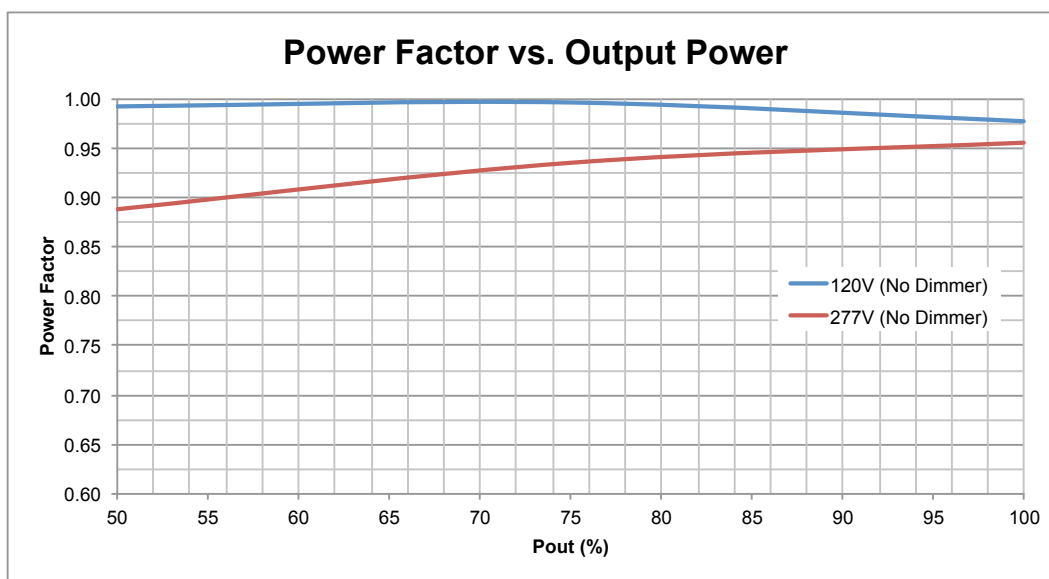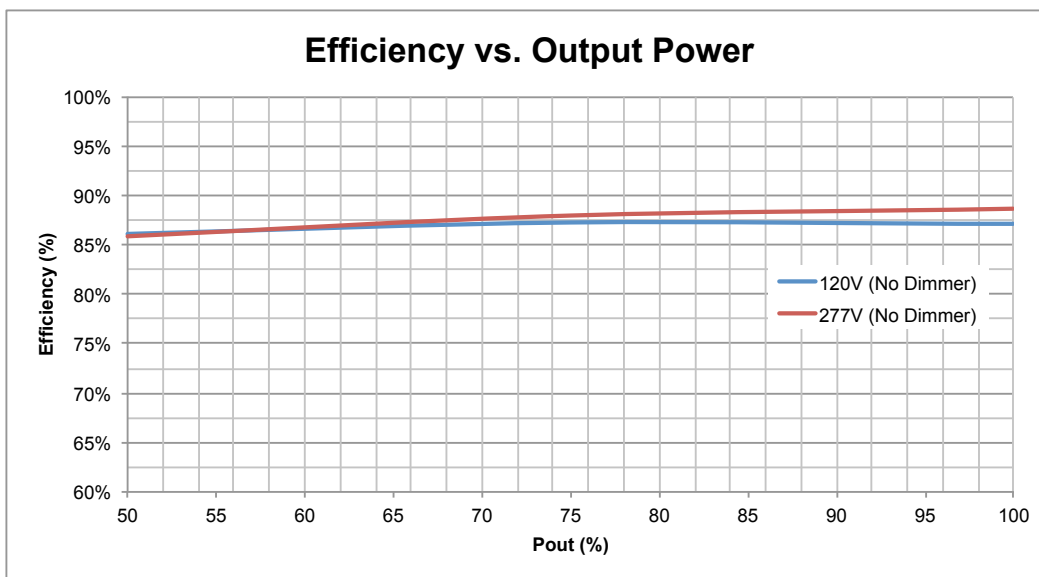

Efficiency and PF measured at 25°C.  
Measurements made on model LV60-24N-UNV-R.


### GENERAL INFORMATION

LED Driver Type	Constant Voltage (Class 2)
Maximum Wattage	60 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

### CASE STYLE R: METAL



### PERFORMANCE CURVES

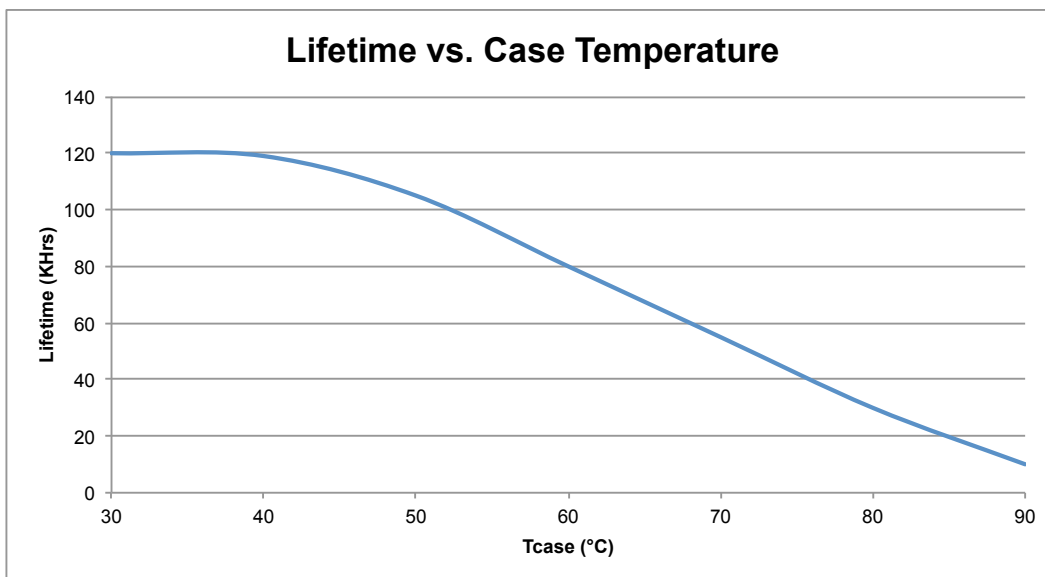

Efficiency and PF measured at 25°C.  
Measurements made on model LV60-24N-UNV-R.